


# ドリルスリーブ



機械側のモールステーパースイズに合わせて、  
工具のモールステーパースイズを大きくするスリーブです。

- ・総焼き入れ総研磨仕上げにより、振れ精度、テーパの当たり、耐久性に優れております。


型式	内側テーパー× 外側テーパー	d	D	L	ℓ <sub>1</sub>
DSL-1×2	1×2	12.065	18.0	92	17
DSL-1×3	1×3		24.1	100	6
DSL-1×4	1×4		31.6	124	6.5
DSL-1×5	1×5		44.7	156	6.5
DSL-1×6	1×6		63.8	220	10
DSL-2×3	2×3	17.780	24.1	112	18
DSL-2×4	2×4		31.6	124	6.5
DSL-2×5	2×5		44.7	156	6.5
DSL-2×6	2×6		63.8	220	10
DSL-3×4	3×4	23.825	31.6	136	18.5
DSL-3×5	3×5		44.7	156	6.5
DSL-3×6	3×6		63.8	220	10
DSL-4×5	4×5	31.267	44.7	168	18.5
DSL-4×6	4×6		63.8	220	10
DSL-4×7	4×7	44.399	83.6	296	10
DSL-5×6	5×6		63.8	225	15
DSL-5×7	5×7		83.6	296	10
DSL-6×7	6×7	63.348			

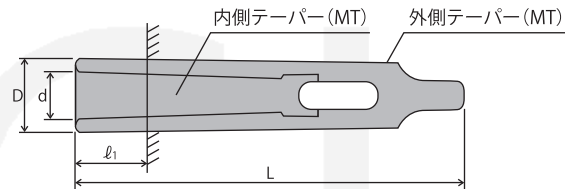

# ドリルソケット



工具長を延長したい場合や、機械側のモールステーパースイズが  
工具のモールステーパースイズより小さい場合に便利なソケットです。

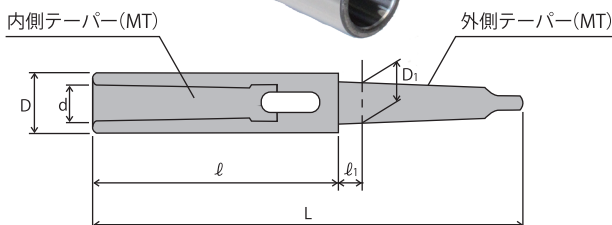

型式	内側テーパー× 外側テーパー	D	d	D <sub>1</sub>	L	ℓ	ℓ <sub>1</sub>	
DSO-1×1	1×1	20	12.065	12.065	147	81.5	3.5	
DSO-1×2	1×2			17.780	160	80.0	5.0	
DSO-1×3	1×3			23.825	180	81.0	6.5	
DSO-1×4	1×4			31.267	200	76.0		
DSO-1×5	1×5			44.399	235	79.0		
DSO-2×1	2×1	24	17.78	12.065	163	97.5	3.5	
DSO-2×2	2×2			17.780	176	80.0	5.0	
DSO-2×3	2×3			23.825	195	96.0		
DSO-2×4	2×4			31.267	220	80.0	6.5	
DSO-2×5	2×5	44.399	253	97.0	6.5			
DSO-3×2	3×2	32	23.825	17.780		196	116.0	5.0
DSO-3×3	3×3			23.825		215	116.0	6.5
DSO-3×4	3×4			31.267	240	117.0		
DSO-3×5	3×5	44	31.267	44.399	273	117.0	8.0	
DSO-3×6	3×6			63.348	335	117.0	5.0	
DSO-4×2	4×2			17.780	221	141.0		
DSO-4×3	4×3			23.825	240	141.0	6.5	
DSO-4×4	4×4	31.267	265	142.0				
DSO-4×5	4×5	44.399	298	142.0	8.0			
DSO-4×6	4×6	63.348	360	176.0		5.0		
DSO-5×3	5×3	54	44.399	23.825	275	176.0	5.0	
DSO-5×4	5×4			31.267	300	177.0	6.5	
DSO-5×5	5×5			44.399	333	177.0		
DSO-5×6	5×6	84	63.348	63.348	395	235.0	8.0	
DSO-6×5	6×5			44.399	391	235.0	6.5	
DSO-6×6	6×6			63.348	453	235.0		
DSO-6×7	6×7		83.058	530	234.0	10.0		